



MEET+ 100

4K PDAF Camera

For desktop video conferencing and live streaming

Meet+ 100 is a high-quality 4K PDAF webcam. Only one USB(Type-C) cable is used to enable power, control and video. Thanks to being equipped with advanced image processing solution and sensor, it presents realistic color, sharp and smooth image.

Meet+ 100 is developed with Telycam's own-developing focusing algorithm, to make the focus unrivalled fast and accurate. Built-in top-rated quality microphone, it can pick up the voice crystal clearly.

Meet+ 100 is the ideal for desktop video conferencing and live streaming.

4K30 | 65°FOV
PRIVACY PROTECTION
PDAF(PHASE DETECTION AUTO FOCUS)




4K sharp image and PDAF(Phase Detection Auto Focus)

Meet+ 100 uses advanced 4K image processor, a Sony 12MP CMOS sensor, and an 60° optical lens for 4K30 and 1080p60 output. PDAF ensures fast, accurate focus at short distances.




3X Digital Zoom

Thanks to its true 4K lens, this zoom camera support max 3X digital zoom with crystal video quality. (2X at 1080P and 3X at 720P)

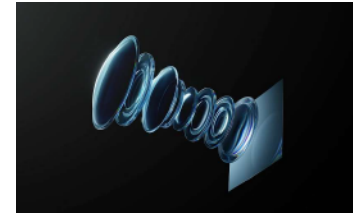

Flexible USB-A/-C Connection

Plug and Play, easy to use, the webcam box package include both 1.5meter USB type A and Type C cable connector.

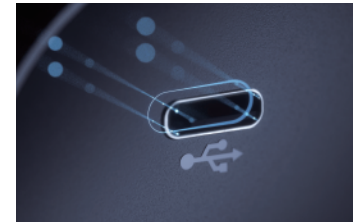

Black Light Compensation

This webcam also support black light compensation, to output always bright and clear image even under low light background.



Security and Privacy Protection

Silicon lens cover help to prevent online hackers from spying on you, and keep the lens clean when the camera not in use.



Specifications

Camera		Meet+ 100
Part Number	TLC-100-U2-4K	
Sensor	1/2.8 inch, 12MP UHD CMOS sensor	
Lens	Iris: F1.8; View Angle: 80°(Diagonal), 65°(Horizontal) Object Distance: 10cm ~ infinity	
Zoom	1080P supports 2X digital zoom, 720P supports 3X digital zoom	
EPTZ	Supported	
Output Interface	USB(Type-c)	
Eocus	AI Auto Focus	

Video Format

YUY2:
1280*720@10;
1024*576@20;
640*480@30

MJPG:
Landscape video:
3840*2160@30;
2560*1440@30;
1920*1080@60;
1920*1080@30;
1280*720@30;
1024*576@30;
640*480@30
Portrait video:
1080*1920@30;
720*1280@30;
576*1024@30;
360*480@30

Image Parameters

White Balance	Auto/Manual
Exposure	Auto/Manual
Flicker	50HZ/60HZ/OFF
2D、3D Noise Reduction	Supported
WDR	Supported
Backlight Compensation	Supported
Mirror, Flip	Supported
Microphone Pointing	Omnidirectional microphone
Sensitivity	-26+2dB RL=2.2KQ Vs=2.0V
S/N Ratio	64dB

General	
Polar Distance	3~5m
Input Voltage	USB power supply
Working Environment	Temperature: -10℃~50℃; Humidity: ≤80%
Webcam Size	76mmxφ48mm
Package Size	114.5mmx87mmx85mm
Net Weight	0.2kg
Gross Weight	0.4kg
Available Color	Dark gray, Silver
Accessories	1.5m USB 2.0(A-C) cable, Manual



Video Output
USB 2.0